


DH-D150T VERTICAL SPRAY

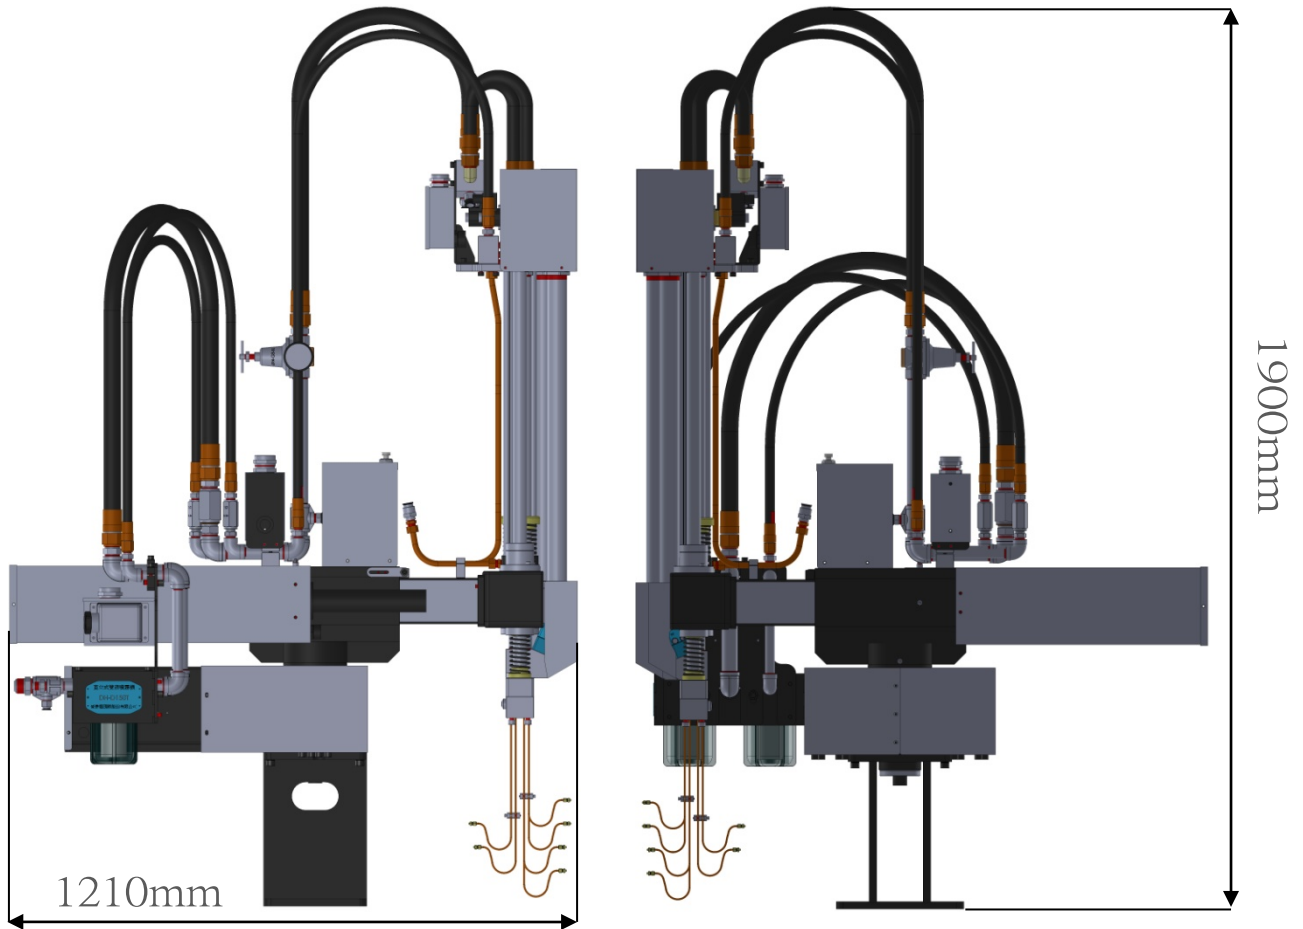

| | |
|-------------------------------------|---|
| Applicable Die Casting Machine Tons | 150T |
| Control Mode | PLCS |
| Up & Down Travel | 550mm |
| Rotation | 90° |
| Front & Rear Mold Adjustment | 240mm |
| Dual-Fluid Atomization Module | one set of movable mold and one fixed mold (one set includes 42pcs of Φ 4mm-copper-tubes) can spray with release agent or water. |
| Mold Cleaning Copper Air Pipe | shared with spray copper pipe, two-stage wind pressure. |
| Sprayer Voltage | 3 Φ AC 220V (transformer can be installed) |
| Wind Source Specification of Inlet | 1 inch air pipe \uparrow , suction pressure 6.5Kg/cm ² \uparrow |

JIN DING YU Co., Ltd.