


DH-D250T VERTICAL SPRAY

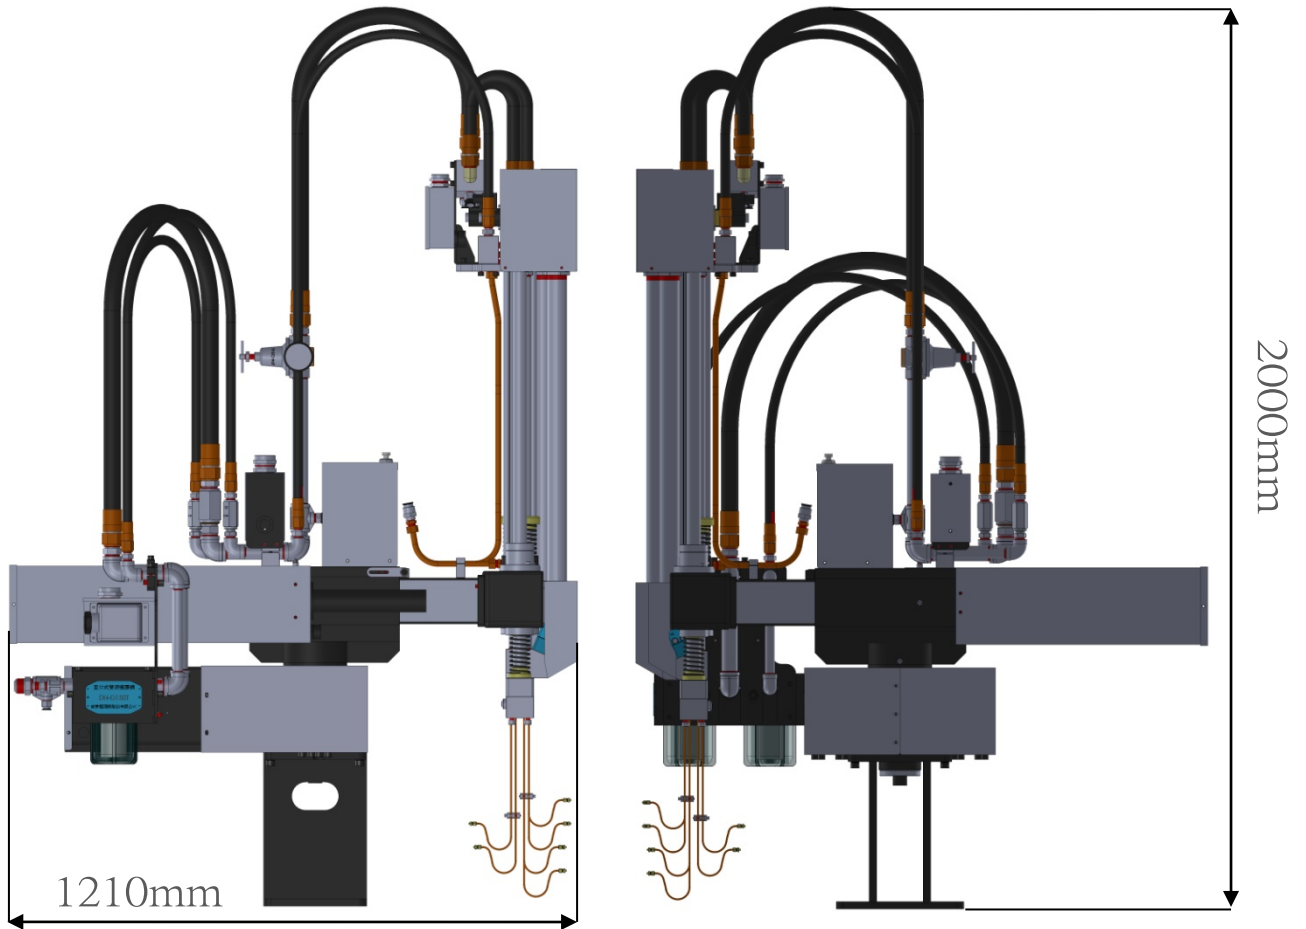

Applicable Die Casting Machine Tons	250T
Control Mode	PLCS
Up & Down Travel	600mm
Rotation	90°
Front & Rear Mold Adjustment	240mm
Dual-Fluid Atomization Module	one set of movable mold and one fixed mold (one set includes 42pcs of Φ 4mm-copper-tubes) can spray with release agent or water.
Mold Cleaning Copper Air Pipe	shared with spray copper pipe, two-stage wind pressure.
Sprayer Voltage	3 Φ AC 220V (transformer can be installed)
Wind Source Specification of Inlet	1 inch air pipe \uparrow , suction pressure 6.5Kg/cm ² \uparrow

JIN DING YU Co., Ltd.