


# BW-D650T-BD FULL CONTROL SPRAY

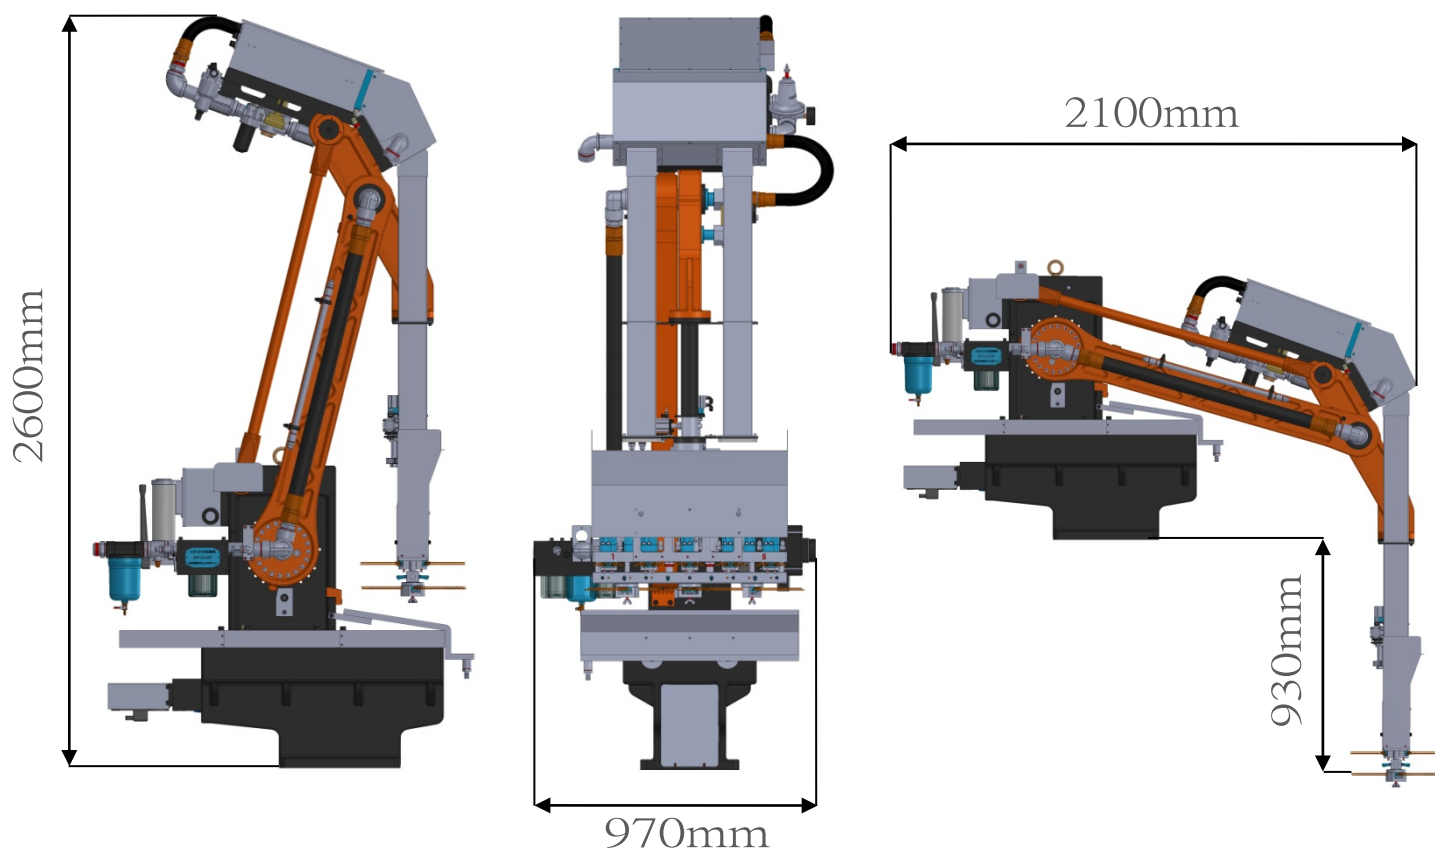

Applicable Die Casting Machine Tons	650T-BD
Control Mode	servo drive, programmable spraying mode.
Front & Rear Travel Adjustment	280mm
Rotating spraying range of atomizer seat	21° for each
Major Spray Module	5 sets of movable mold and fixed mold (1 set is with 11pcs of $\Phi 4\text{mm}$ -copper-tube.) can spray with release agent or water.
Auxiliary Spray Module	1 set of left, center and right (1 set is with 9pcs $\Phi 4\text{mm}$ -copper-tubes) can spray with release agent or water and free rotation angle.
Mold Cleaning Air Nozzle	18 pcs (reserved teeth for additional copper tubes)
Sprayer Voltage	3 $\Phi$ AC 220V (transformer can be installed.)
Wind Source Specification of Inlet	1-1/2 inch air pipe $\uparrow$ , suction pressure 6.5Kg/cm <sup>2</sup> $\uparrow$

JIN DING YU Co., Ltd.